DeltaStream Evaporative Cooling System
SUBMITTAL

Moffitt Ventilation Solutions

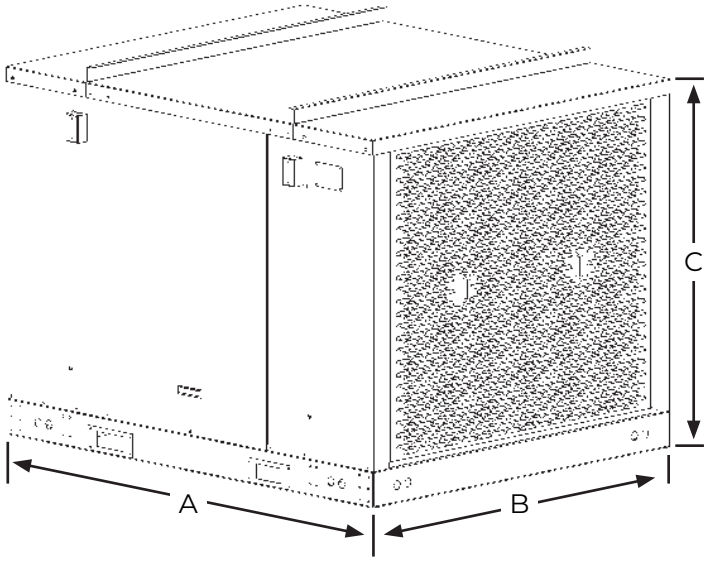

Project Number: _____

Project Name: _____

Customer: _____

Date: _____

Drive: Belt Drive

Material: Aluminum

Finish: _____

Motor: _____

Propeller: _____

DISCHARGE	DIMENSIONS (in.)					DRY WEIGHT (lbs.)	WET WEIGHT (lbs.)
	A	B	C	CURB CAP SIZE	DUCT SIZE		
Downward	85	73	62	52 × 52	46 × 46	750	950

Standard Features

- Mill-finish 5052 marine-grade aluminum cabinet
- Sealed aluminum rivets
- Totally Enclosed Fan Cooled (TEFC) motor
- 8-in.-thick rigid celluose media designed for high-efficiency cooling
- Clear vinyl tube for ease of inspection
- Up to 16,000 CFM of sub-ambient supply air per unit
- Heavy-duty 3 HP motor
- Dual high-strength thermoformed polymer reservoirs

QTY	TAGS	MODEL	TYPE	HP	RPM	ELECTRICAL	STATIC PRESSURE	AIR FLOW

(904) 241-9944| MoffittCorp.com

Moffitt continuously improves our products. Specifications and dimensions are subject to change.
®The Moffitt logo is a registered trademark of Moffitt in the U.S., Mexico, and Canada. | ©2026 Moffitt. All rights reserved. Version 2 | October 2026

DeltaStream Evaporative Cooling System
SUBMITTAL

Moffitt Ventilation Solutions

- DeltaStream units are furnished with integrated lifting points for quick and efficient installation. Consult the product I.O.M. for proper unit hoisting procedures.
- Multiple DeltaStream units can be controlled by a single central controller.
- Units communicate using a minimum CAT 5e Ethernet cable.

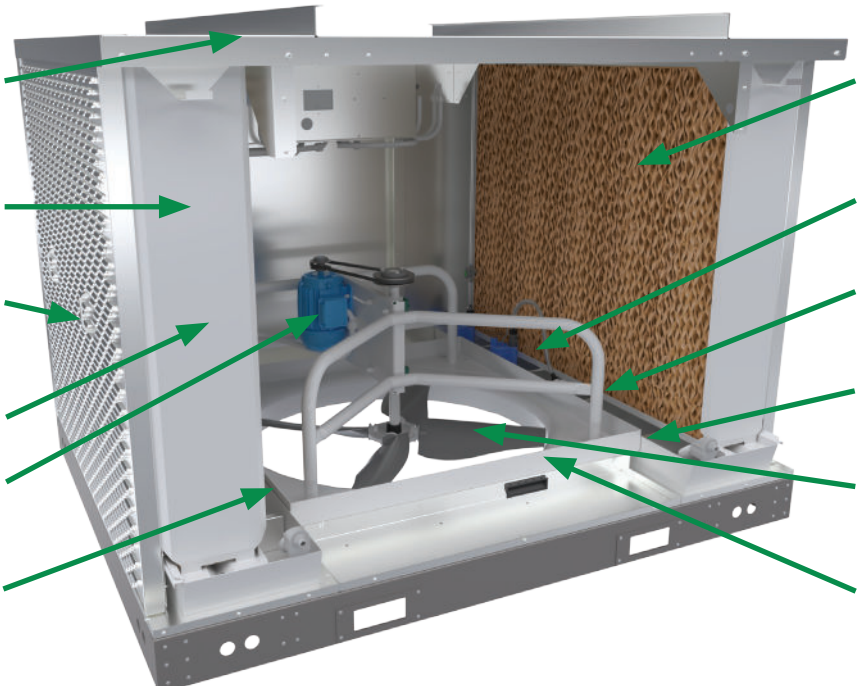

Optional Features

Damper

- ☐ Ducting
- ☐ Diffuser

Additional

- ☐ Maintenance
- ☐ Automated controls

Notes

Warranty

Please scan the QR code (left) or visit *moffittcorp.com/warranty* for equipment warranty information.

(904) 241-9944| MoffittCorp.com

Moffitt continuously improves our products. Specifications and dimensions are subject to change.
®The Moffitt logo is a registered trademark of Moffitt in the U.S., Mexico, and Canada. | ©2026 Moffitt. All rights reserved. Version 2 | October 2026