Romla Model P Direct Drive Fan
SUBMITTAL

Moffitt Ventilation Solutions

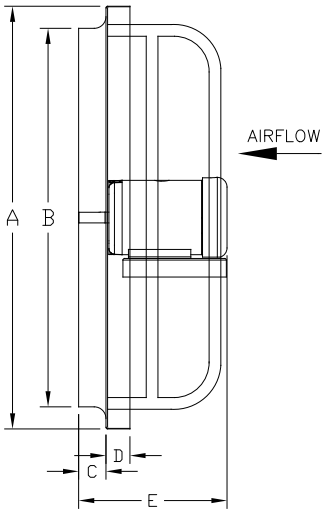

EXHAUST

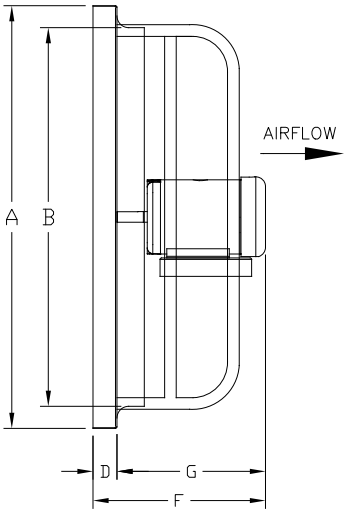

SUPPLY

Project Number: _____

Project Name: _____

Customer: _____

Date: _____

Drive: **Direct Drive** _____

Material: **Steel** _____

Finish: _____

Motor: _____

Prop: _____

SIZE	DIMENSIONS (in.)							APPROXIMATE WEIGHT (lbs.)
	A	B	C	D	E	F	G	
24	30	25	5	2.75	15.625	18.875	16.125	185
30	36	31	5	2.75	15.75	19	16.25	235
36	42	37	5	2.75	21.25	21.75	19	270
42	48	43	5	2.75	21.75	22.875	20.125	280
48	54	49	5	2.75	26.75	25.375	22.625	376
54	60	55	5.5	2.75	26	28.625	25.875	400
60	66	61	5.5	2.75	26.5	28.625	25.875	415

Specifications for fan size 72 available upon request.

Standard Features

- Heavy-gauge steel construction with welded connections
- High performance propeller
- Totally Enclosed Fan Cooled (TEFC) motor
- Direct drive transmission for simplified operation and maximum efficiency
- Deep spun venturi panel provides superior strength and higher efficiency
- Standard gray, polyurethane coated exterior

TAGS	QTY	MODEL	HP	RPM	ELECTRICAL	STATIC PRESSURE	AIRFLOW

(904) 241-9944 | MoffittCorp.com

Moffitt continuously improves our products. Specifications and dimensions are subject to change.
®The Moffitt logo is a registered trademark of Moffitt in the U.S., Mexico, and Canada. | ©2026 Moffitt. All rights reserved. Version 2 | October 2026

Romla Model P Direct Drive Fan
SUBMITTAL

Moffitt Ventilation Solutions

- Fans may be furnished with factory-installed lifting lugs for quick and efficient installation. Consult the I.O.M. for proper fan hoisting procedures.
- Fans must be installed with remote motor overload protection. Fan motors are not provided with inherent overload or over current protection.
- ⚠ Do not use in hazardous environments where the fan's electrical system could ignite combustible or flammable materials. Units specifically built for hazardous conditions are required for those settings.
- ⚠ Fan guards must be installed when equipment is within reach of the personnel, or within (7) feet of the working level, or when deemed advisable for safety, per OSHA requirements. Guards should be provided by installation personnel when deemed necessary.

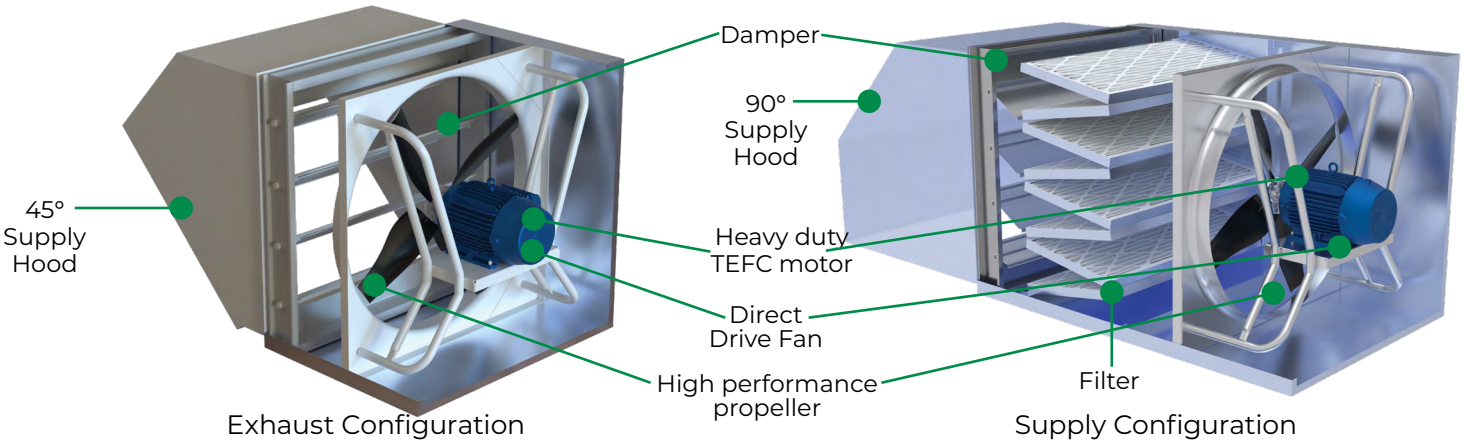

Unit may not include accessories shown above.

Optional Features

General Accessories
- ☐ Wall Collar
- ☐ Wall Housing
- ☐ Filter Box (Supply Only)
- ☐ Inner Guard
- ☐ Outer Guard (bird screen)
- ☐ Outer Guard (insect screen)

Damper
- ☐ Gravity Damper
- ☐ Motorized Damper
- ☐ Factory Wired
- ☐ Ships Loose

Disconnect Switch
- ☐ NEMA3R
- ☐ NEMA4 / 4X
- ☐ Factory Wired
- ☐ Ships Loose

Weather Hood
- ☐ 45 Degree
- ☐ 90 Degree
- ☐ Assembled
- ☐ Knocked Down (KD)

Installation Accessories
- ☐ Knee Braces
- ☐ Lifting Lugs
- ☐ Install Hardware
- ☐ Custom Support Steel

Additional
- ☐ Custom Finish
- ☐ UL Listed, UL705
- ☐ Other

Notes

Warranty

(904) 241-9944 | MoffittCorp.com

Moffitt continuously improves our products. Specifications and dimensions are subject to change.
®The Moffitt logo is a registered trademark of Moffitt in the U.S., Mexico, and Canada. | ©2026 Moffitt. All rights reserved. Version 2 | October 2026