Romla Model V Drive Drive Fan
SUBMITTAL

Moffitt Ventilation Solutions

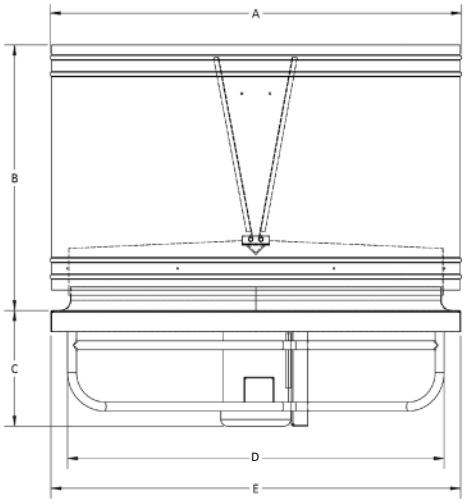

Project Number: _____

Project Name: _____

Customer: _____

Date: _____

Drive: Direct Drive

Material: Steel

Finish: _____

Motor: _____

Prop: _____

FAN SIZE	DIMENSIONS (in.)					STEEL GAUGE		AVERAGE WEIGHT (lbs.)
	A	B	C	D	E	CURB CAP	WIND BAND	
24	30	22	12	24	30	16 GA	20 GA	183
30	36	29	12	30	36	16 GA	20 GA	227
36	42	30	17	36	42	16 GA	20 GA	344
42	48	33	17	42	48	14 GA	20 GA	443
48	54	38	22	48	54	14 GA	20 GA	510
54	60	40	21	54	60	12 GA	20 GA	656
60	66	44	21	60	66	12 GA	18 GA	730

Specifications for fan sizes 72, 84, and 96 available upon request.

Standard Features

- Heavy gauge galvanized steel wind band, beaded for additional strength.
- High performance propeller.
- Totally Enclosed Fan Cooled (TEFC) motor.
- Direct drive transmission for simplified operation and maximum efficiency.
- Sturdy, all-welded motor frame.
- Butterfly steel dampers with magnetic damper latches and water runoff troughs for weather-tight operation.
- Deep spun venturi panel provides superior strength and higher efficiency.
- Polyurethane coated exterior.

TAGS	QTY	MODEL	HP	RPM	ELECTRICAL	STATIC PRESSURE	AIRFLOW

(904) 241-9944| MoffittCorp.com

Moffitt continuously improves our products. Specifications and dimensions are subject to change.
®The Moffitt logo is a registered trademark of Moffitt in the U.S., Mexico, and Canada. | ©2026 Moffitt. All rights reserved. Version 1 | October 2026

- Steel bearing support plate is welded to interior pipe struts. Polyurethane coating protects the exterior of the unit against corrosion and wear.
- Windband is easily removable for direct access to components for inspection and service.
- Fans are furnished with factory-installed lifting lugs for quick and efficient installation. Consult the product I.O.M. for proper fan hoisting procedures.
- Fans must be installed with remote motor overload protection. Fan motors are not provided with inherent overload protection or over current protection.
- ⚠ Do not use in hazardous environments where the fan's electrical system could ignite combustible or flammable materials. Units specifically built for hazardous conditions are required for those settings.
- ⚠ Fan guards must be installed when equipment is within reach of the personnel, or within (7) feet above the working level, or when deemed advisable for safety, per OSHA requirements. Guards should be provided by installation personnel when deemed necessary.

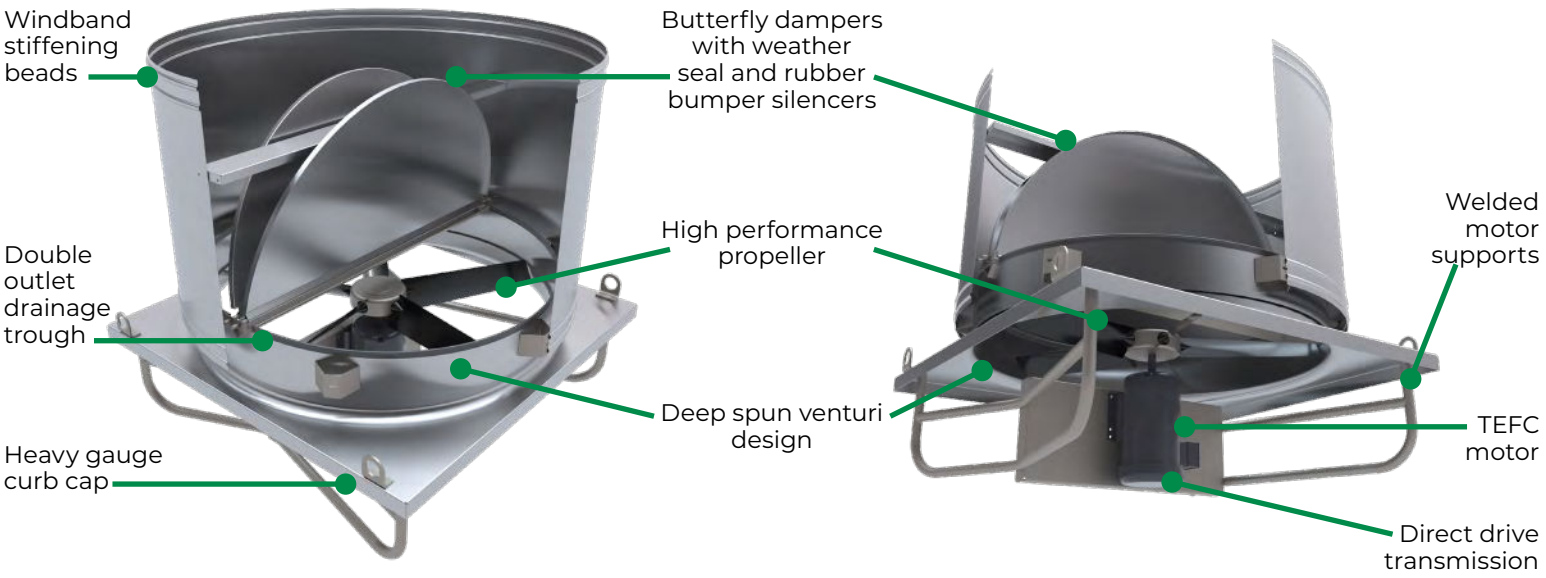

Optional Features

General Accessories

- ☐ Roof Curb (see Curb Submittal)
- ☐ Curb Adapter (see Curb Submittal)
- ☐ Inner Guard
- ☐ Outer Guard (Bird Screen)

Additional:

- ☐ Custom Finish
- ☐ UL Listed, UL705
- ☐ Other

Disconnect Switch

- ☐ NEMA3R
- ☐ NEMA4 / 4X
- ☐ Factory Wired
- ☐ Ships Loose

Notes

Warranty

Please scan the QR code (left) or visit *moffittcorp.com/warranty* for equipment warranty information.

Moffitt continuously improves our products. Specifications and dimensions are subject to change.
®The Moffitt logo is a registered trademark of Moffitt in the U.S., Mexico, and Canada. | ©2026 Moffitt. All rights reserved. Version 1 | October 2026