MoffittVent Natural Ventilator
SUBMITTAL

Moffitt Ventilation Solutions

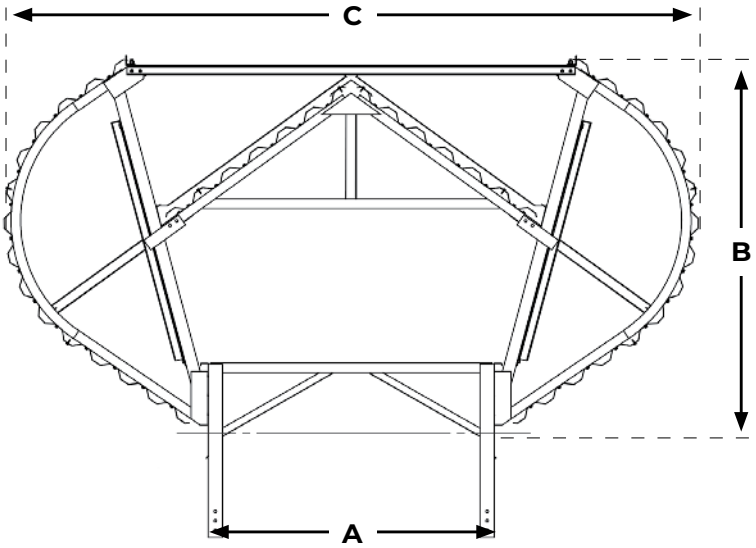

Project Number: _____

Project Name: _____

Customer: _____

Date: _____

MODEL	DIMENSIONS (in.)				VENT WEIGHT* (lb./ft.)
	THROAT WIDTH (A)	VENT HEIGHT (B)	FRAME WIDTH (C)	LENGTH	
MV-24	24	36.5	61.8	As Needed	41
MV-36	36	49.0	88.3		54
MV-48	48	62.0	114.6		65
MV-72	72	92.7	167.9		122
MV-96	96	118.3	225.8		165
MV-120	120	145.2	274.3		210
MV-144	144	173.2	326.7		280
MV-180	180	209.5	404.8		387

**Approximate weights with no optional features. Based on standard 9 ft. 8 in. spacing.*

Standard Features

- Steel angle frames, prime painted red
- Galvalume corrugated sheeting (cladding) with mill finish
- Galvanized steel flashings with mill finish
- Typical frame spacing is 9 ft. 8 in.; spacing may be decreased as needed to accommodate a higher wind or snow load, or the building steel layout
- **Shipping:**
  - Knocked-down for on-roof assembly and installation
- **Fasteners:**
  - Sheeting (cladding) fasteners, stainless steel, connect the corrugated siding to the unit
  - Mounting fasteners, zinc plated, connect the unit to the building
  - Frame fasteners, zinc plated, attach the separate frame members together

Qty	Tags	Model	DIMENSIONS (in.)				Vent Weight (lb./ft.)
			Throat Width (A)	Vent Height (B)	Frame Width (C)	Length	

Moffitt continuously improves our products. Specifications and dimensions are subject to change.
®The Moffitt logo is a registered trademark of Moffitt in the U.S., Mexico, and Canada. | ©2026 Moffitt. All rights reserved. Version 1 | October 2026

MoffittVent Natural Ventilator
SUBMITTAL

Moffitt Ventilation Solutions

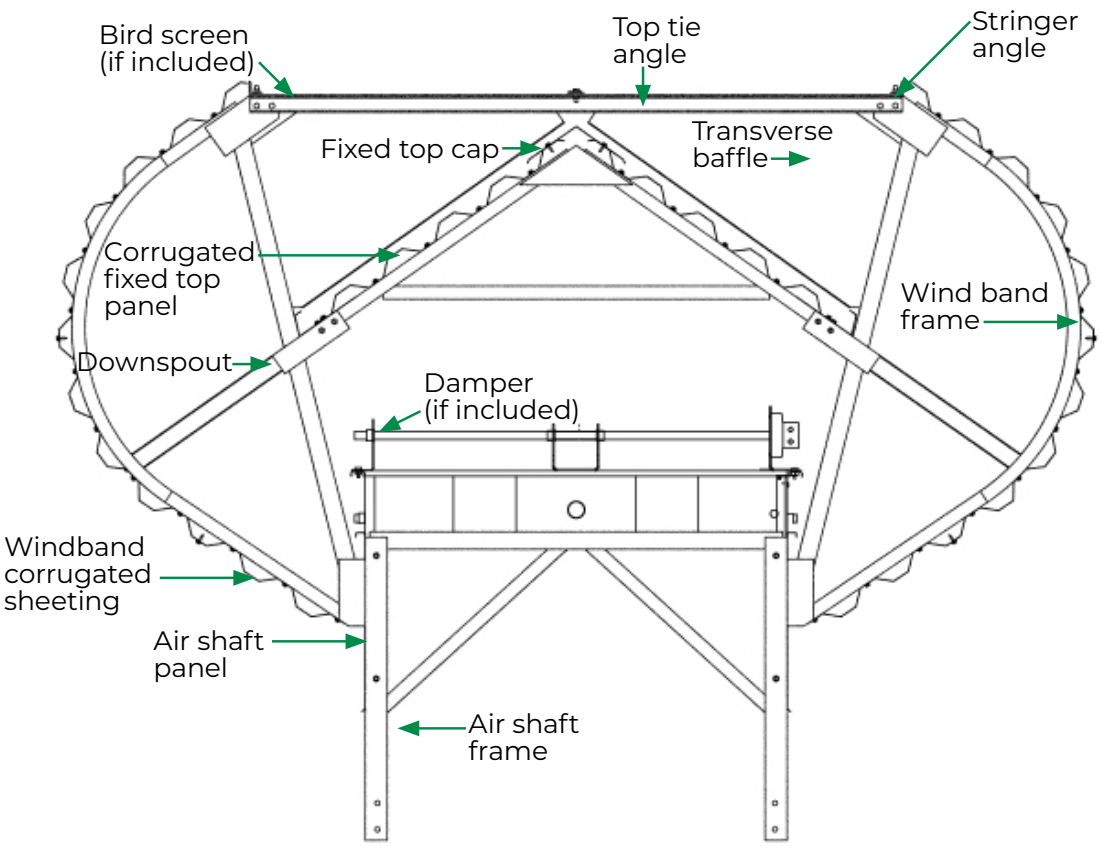

Optional Features

Bird Screen
- ☐ 0.5-inch mesh, 19-gauge galvanized steel

Damper
- ☐ Assembly (including motor)

Silencers
(Custom manufactured to site specifications.)
- ☐ Mounted above the roof line
- ☐ Mounted below the roof line

Insulation
- ☐ Air shaft
- ☐ Damper blade

Sheeting (cladding)
- ☐ Aluminum
- ☐ Stainless steel
- ☐ Fiberglass
- ☐ Corrugated
- ☐ Flat

Finish
- ☐ Kynar® exterior + wash coat interior
- ☐ Kynar® exterior + interior
- ☐ Custom specialty paint

Frame
- ☐ Hot dip galvanized
- ☐ Custom materials _____
- ☐ Custom coatings _____

Shipping
- ☐ Knocked down for on-ground assembly and hoisting
- ☐ Assembled, in sections, for hoisting and on-roof installation

Notes

Warranty

Please scan the QR code (left) or visit *moffittcorp.com/warranty* for equipment warranty information.

(904) 241-9944| MoffittCorp.com

Moffitt continuously improves our products. Specifications and dimensions are subject to change.
®The Moffitt logo is a registered trademark of Moffitt in the U.S., Mexico, and Canada. | ©2026 Moffitt. All rights reserved. Version 1 | October 2026